




Atari 5200 Game Cartridge Disassembly

Cleaning Atari 5200 Game Cartridge.

Written By: Zach Petryszyn

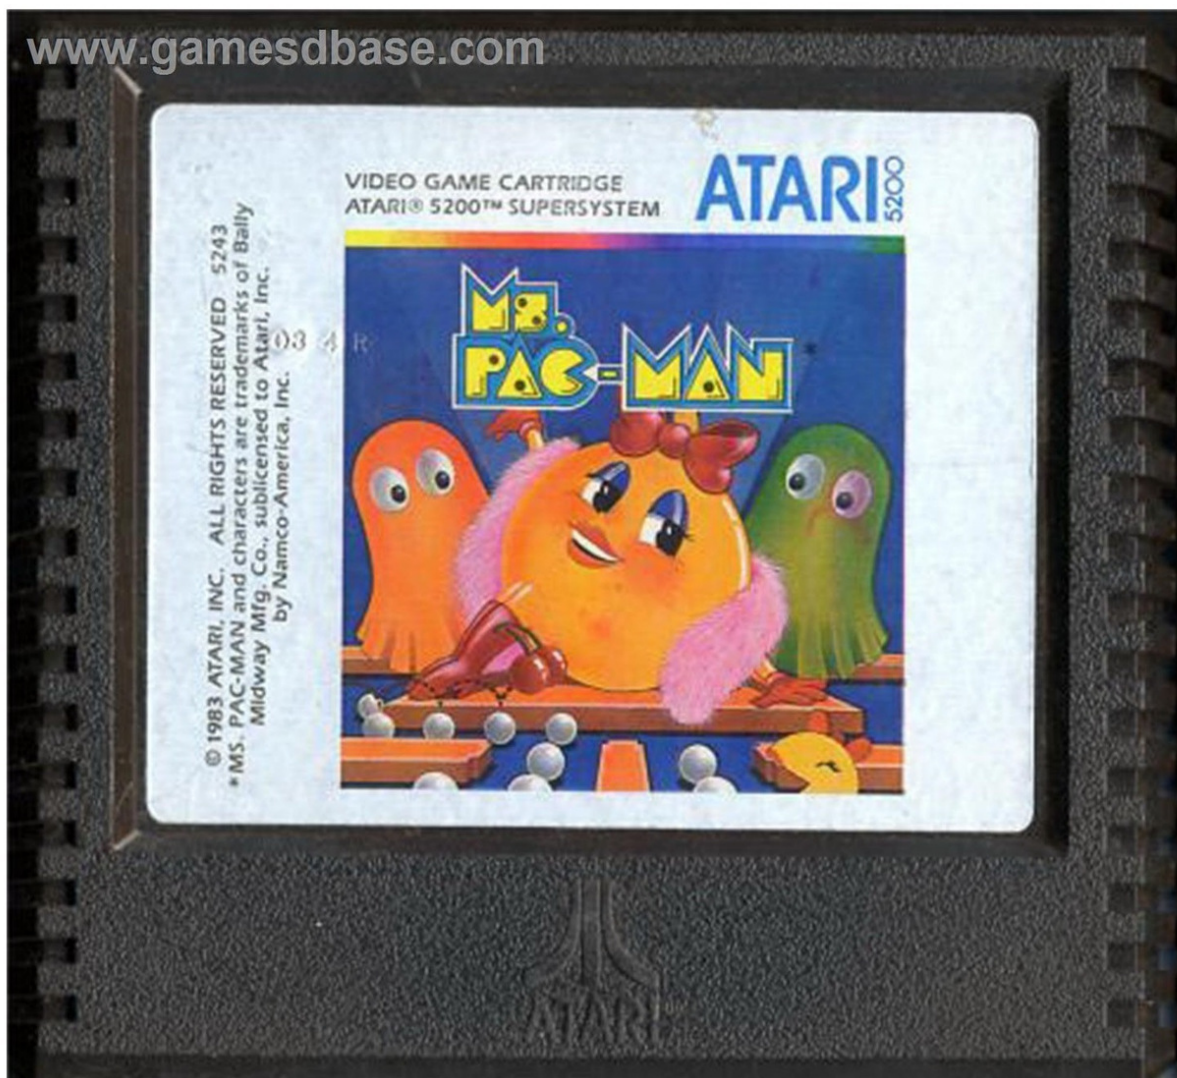

INTRODUCTION




These cartridges often will freeze due to a poor connection to the mainboard. Opening it and removing excess dust will improve the connection, reducing the amount of freezing.



TOOLS:


- [Compressed Air](#) (1)
 - [Soft Cloth](#) (1)
 - [High Content Rubbing Alcohol](#) (1)
-

Step 1 — Opening up the cartridge

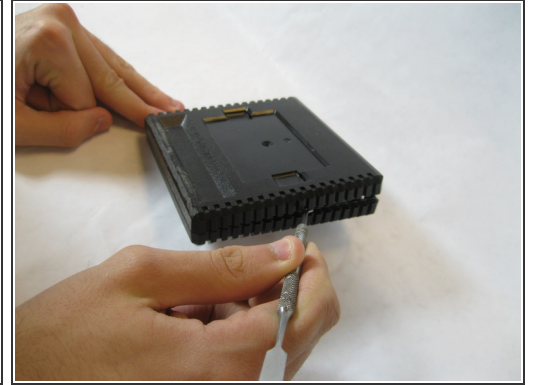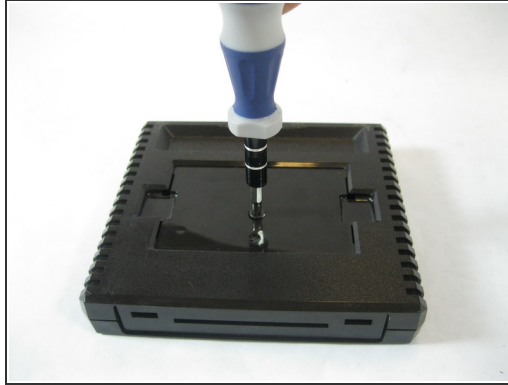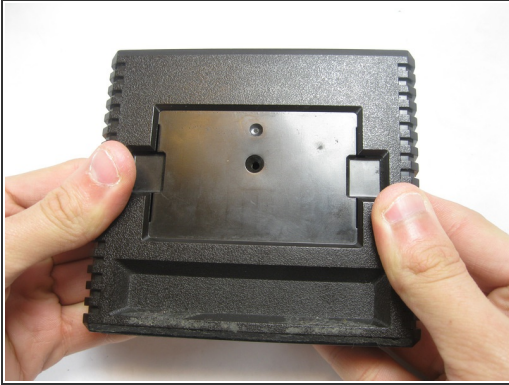




- Flip the cartridge over.
- Unscrew the single screw on the back.
- Carefully pry apart the casing. There are six (6) tabs that need to be released, three (3) each side. If you're not careful they will break. (experience has taught me)
- Set aside any case parts after disassembly.

Step 2 — Cleaning the Parts

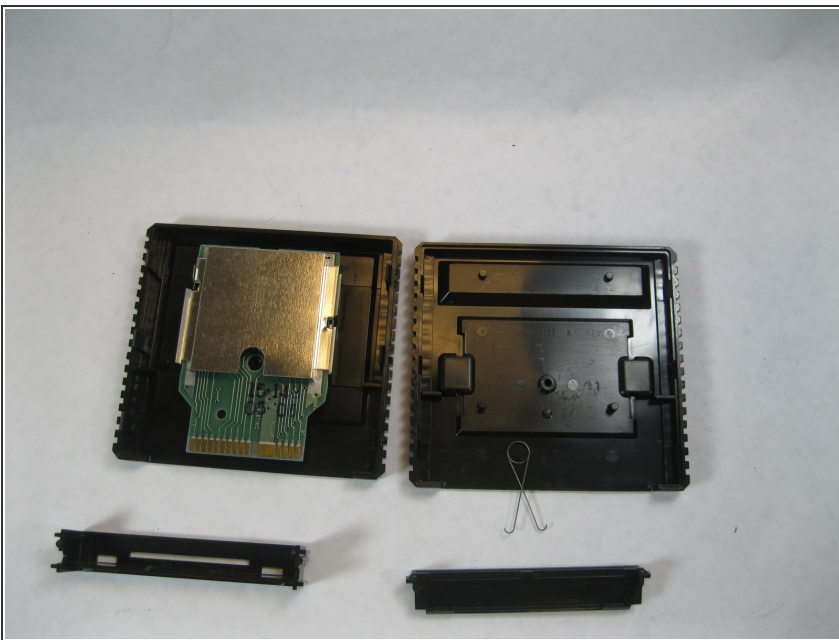



- Unscrew the board casing, and remove it.
- Use a compressed air can to blow off any excess dust off the board.
- Use an alcohol-dabbed cloth to wipe down the gold-plated contacts of the board.

Step 3 — Reassembly

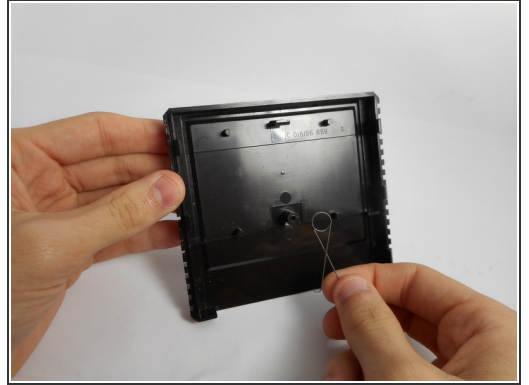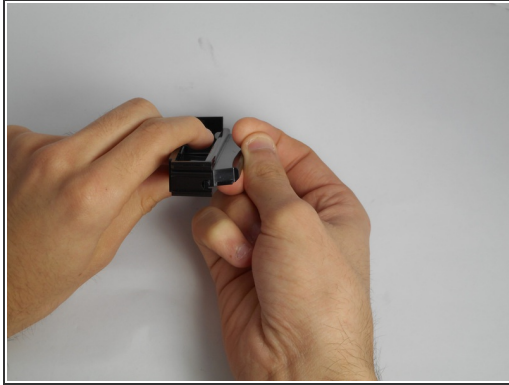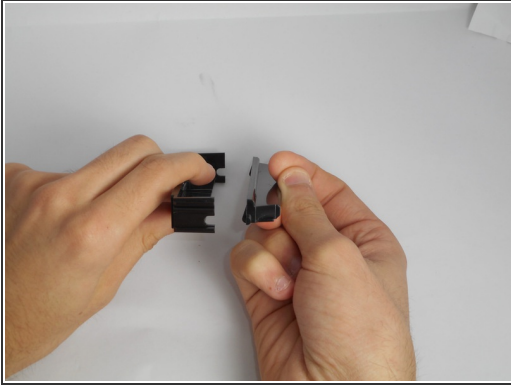




- Place the two contact protectors together.
- Place the spring on the knob in the cartridge.

Step 4 — Reassembly, Part 2

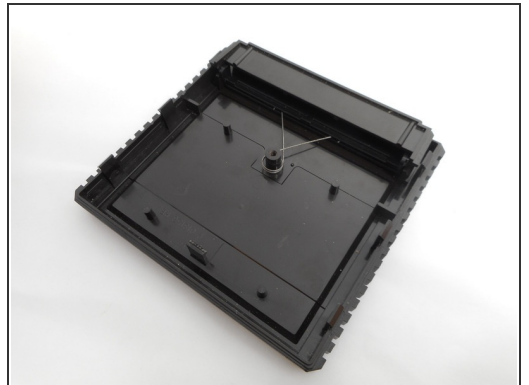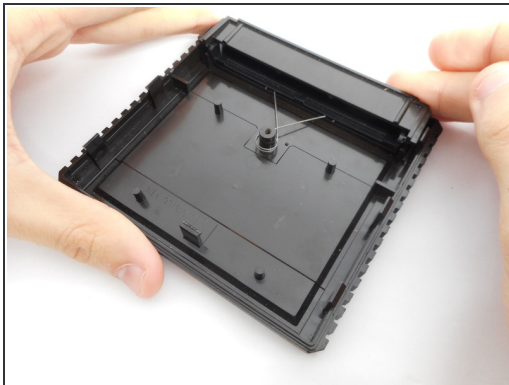

- Thread the spring into the connected plates.
- Push the plates into the cartridge against the pressure of the spring.

Step 5 — Finishing up

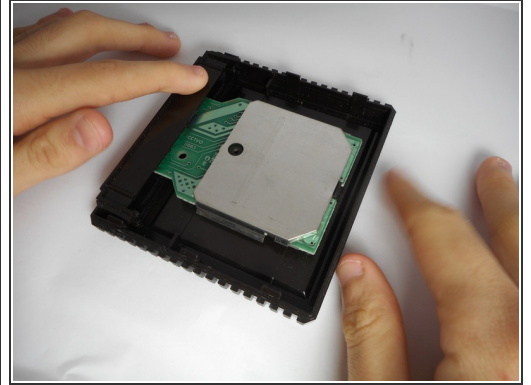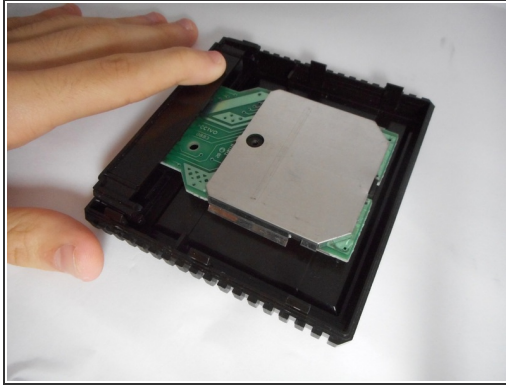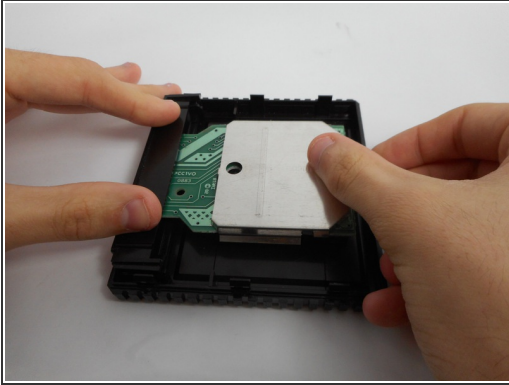

- Place the chip in the case.
- ⓘ It should "pop" into place.
- Screw the other side of the case on.

Be sure to test the game, and if freezing still occurs, check the contacts once again.

This document was last generated on 2017-06-20 03:41:56 AM.